
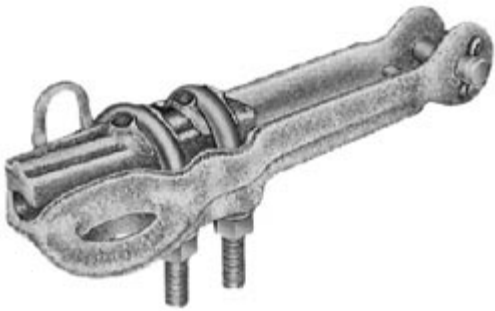



Product Datasheet	
ANDERSON FARGO	
ADS88N -- Deadend, Straight line	
 Deadend, Straight line, AAC, AAAC, ACAR, ACSR, Conductor Range 0.31 - 0.88 in, Fitting: None	
Product Specifications	
Category Image	 Bolted Deadends Aluminum & Bronze Straight Line Aluminum & Copper Conductor
Series Image (Bolted)	 ADS Series Straight Line Dead End Bolted, Aluminum AAC, AAAC & ACSR Conductor
PDF Catalog Page	Click HERE to view the web page.
Fitting Type	None
Style	ADS - Deadend, Straight line
Type	Bolted
Material	Aluminum
Fitting Catalog No.	NONE
Voltage Application	Std
Body and Keeper Material	356 T6 Aluminum Alloy
Hardware Material	Galvanized Steel

Ultimate Body Strength	10,000 lb (4,536 kg)
U-Bolts	2
Bolt Size	1/2 in (12.70 mm)
Dimension B	4.50 in (114.3 mm)
Dimension L	9.0 in (228.60 mm)
Dimension W	.94 in (23.88 mm)
Pin Diameter	5/8 in (15.88 mm)
Clevis Opening	.9375 in (23.81 mm)
Diameter Range	0.31 - 0.88 in
Conductor Range Minimum - Maximum	AAC 1 str (7) Thru AAC 556.5 kcmil (37) AAAC 2 str(7) Thru AAAC 559.6 kcmil str (19) ACSR 2 (6/1) Thru ACSR 556.5 kcmil (18/1) ACAR 503.6 kcmil (15/4) Thru ACAR 587.2 kcmil (15/4)
Minimum Conductor Diameter	0.31
Maximum Conductor Diameter	0.88
Weight / Ea.	2.52 lbs
Standard Package	20
UPC Code	09635928154

Compressed Product Number
ADS88N

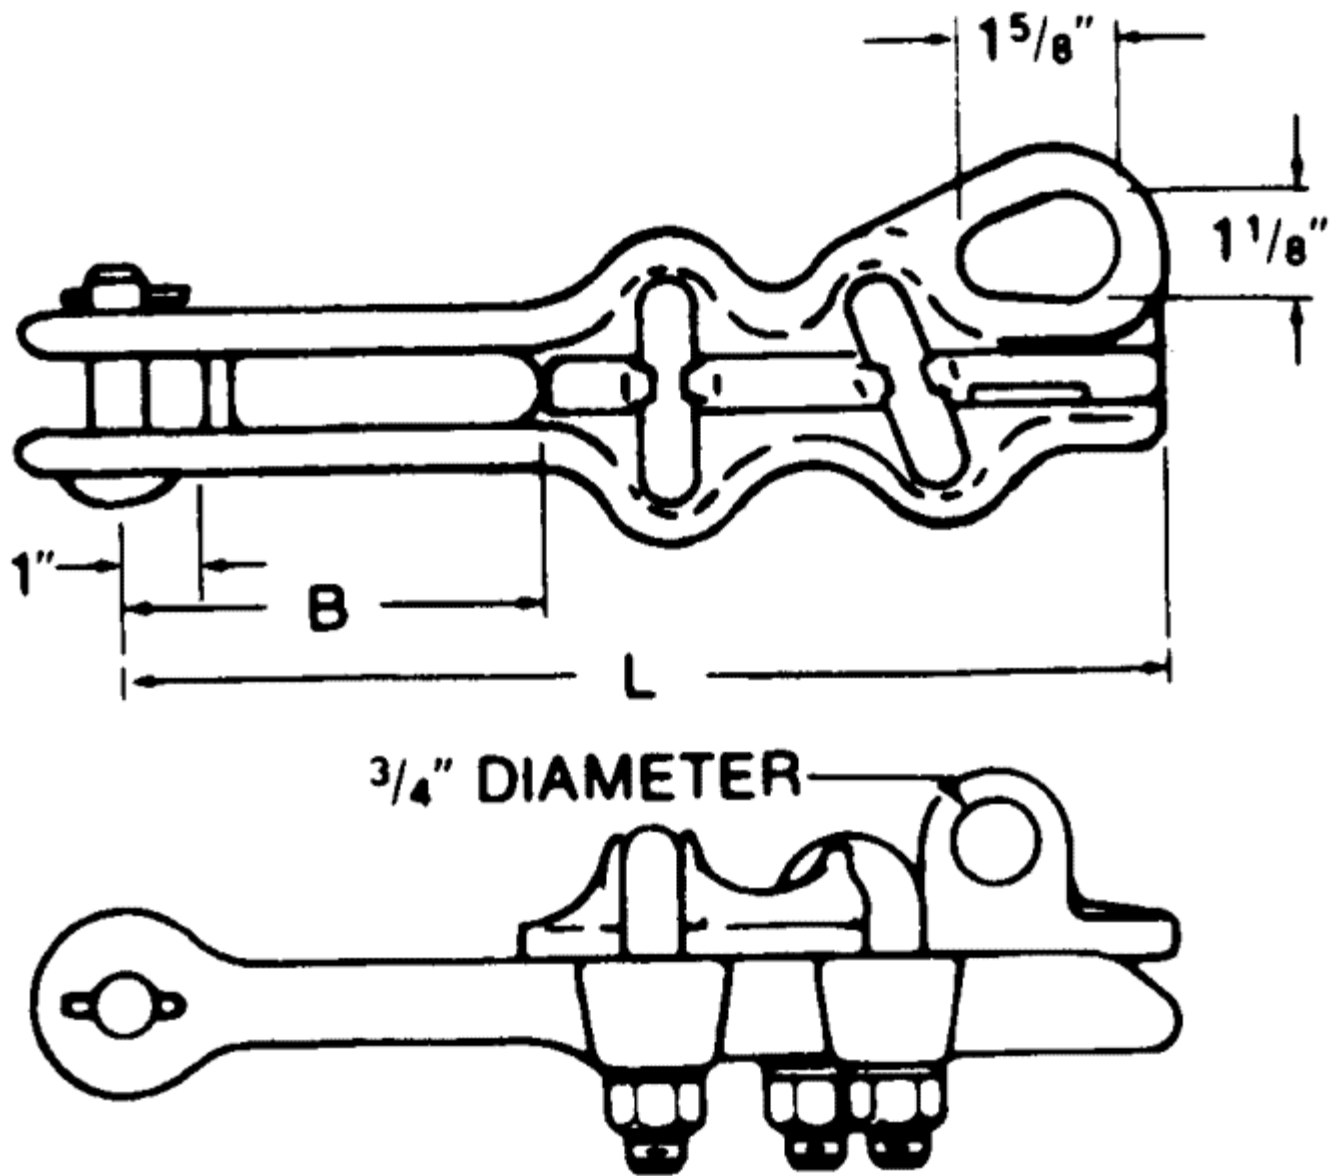

Dimensions

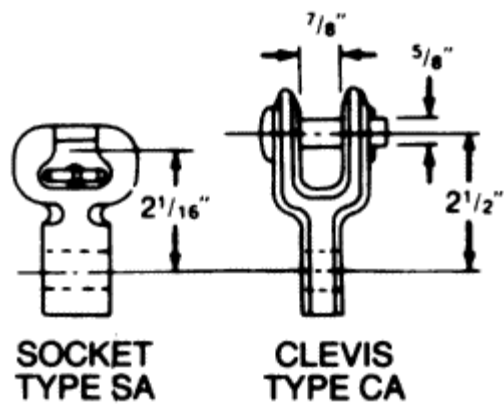

Socket & Clevis Fitting



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.