

# GEC Durham Industries, Inc.

## TYPE AP

INSTRUMENT CURRENT TRANSFORMER  
600 VOLT CLASS FOR USE IN PAD MOUNTED  
DISTRIBUTION TRANSFORMERS

### STANDARD FEATURES:

- 60 Hertz, 600 VAC, 10KV Bil.
- Clear sealable secondary terminal cover
- Retained shorting device
- Pressure type secondary terminals
- "Grabber" for stabilizing unit on a bus bar
- Certified test record with each transformer
- Meet ANSI, NEMA AND EEI standards



MODEL	PRIMARY AMPS	CATALOG NUMBER	BURDEN 0.3 ACCURACY CLASS	30C RATING FACTOR	55C RATING FACTOR	85C RATING FACTOR	FIGURE 1 DIMENSION A	WEIGHT
AP2	200	601	0.1	3.0	3.0	3.0	2"	7lbs.
AP2	200	601A	0.1	4.0	4.0	4.0	2"	7lbs.
APN2	200	601N	0.2	3.0	3.0	3.0	2-1/2"	9lbs.
APNE2	200	601NE	0.2	4.0	4.0	4.0	2-1/2"	9lbs.
AP3	300	602	0.2	3.0	3.0	3.0	2"	7lbs.
AP4	400	603	0.2	4.0	4.0	4.0	2"	7lbs.
APN4	400	603N	0.5	4.0	4.0	4.0	2"	7lbs.
AP5	500	604	0.5	3.0	3.0	3.0	2"	7lbs.
<b>AP6</b>	<b>600</b>	<b>605</b>	<b>0.5</b>	<b>3.0</b>	<b>3.0</b>	<b>3.0</b>	<b>2"</b>	<b>7lbs.</b>
AP8	800	606	0.5	3.0	3.0	2.5	2"	7lbs.
AP10	1000	607	0.5	2.0	2.0	2.0	2"	7lbs.
AP12	1200	608	0.9	2.0	2.0	2.0	2"	7lbs.
AP15	1500	609	1.8	2.0	2.0	2.0	2"	7lbs.
AP20	2000	610	1.5	1.5	1.5	1.5	2"	7lbs.
AP30	3000	611	1.8	1.33	1.33	1.33	2"	7lbs.
AP40	4000	612	1.8	1.0	1.0	1.0	2-1/2"	9lbs.

EXTENDED RANGE TRANSFORMERS WITH PRESSURE TYPE SECONDARY TERMINALS										
MODEL	RATIO	CATALOG NUMBER	RATED BURDEN	0.6% ACCURACY CLASS	0.3% ACCURACY CLASS	30C RATING FACTOR	55C RATING FACTOR	85C RATING FACTOR	FIG 1	WEIGHT
AP2Y	200:5	601Y	0.1	8-79 AMPS	80-800 AMPS	4.0	4.0	4.0	1	9lbs.
AP5Y	500:5	604Y	0.5	20-199 AMPS	200-2000 AMPS	4.0	4.0	4.0	1	7lbs.
AP15Y	1500:5	609Y	0.5	60-599 AMPS	600-3000 AMPS	2.0	2.0	2.0	1	7lbs.

Specifications Subject to Change Without Notice.

# TYPE AP

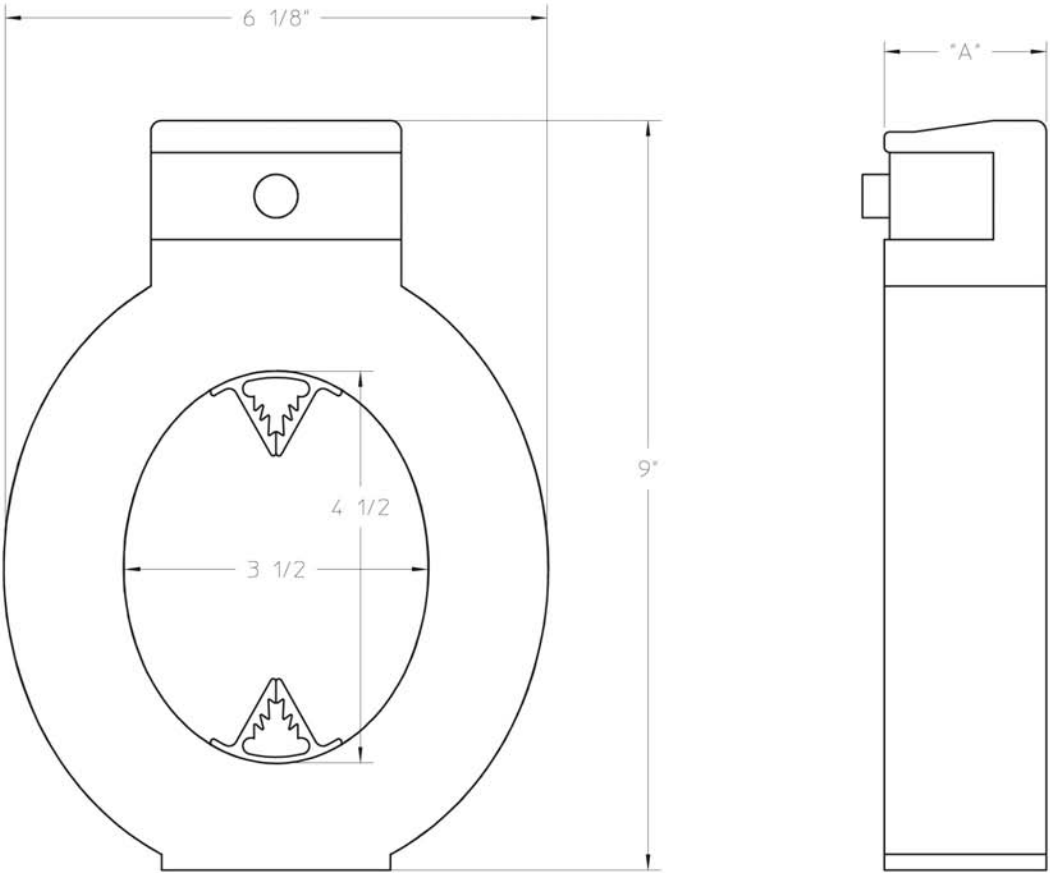


Figure 1